

Quansheng UV-K5 (egzumer Firmware)

Steps to setup the Quansheng UV-K5 radio with the custom egzumer Firmware and load VA7FI's frequency list

To flash the firmware:


1. Turn off the radio
2. Plug the Baofeng programming cable to the radio and computer.
3. Press and hold the PTT while turning the radio on (the LED will be on and the screen off)
4. Using a Chrome based browser, go to: <https://github.com/egzumer/uv-k5-firmware-custom/releases>
5. Click on "FLASH WITH A BROWSER"
6. Click on "Flash firmware"
7. The LED on the radio will flash while in progress.

To load the frequencies and settings:

1. Turn radio on and open Chirp
2. Open the

UV-K5 img file

(File → Open)
3. Edit any of the frequencies you want to change under Memories
4. And edit the Settings (specially the Message line 1 and Message line 2):

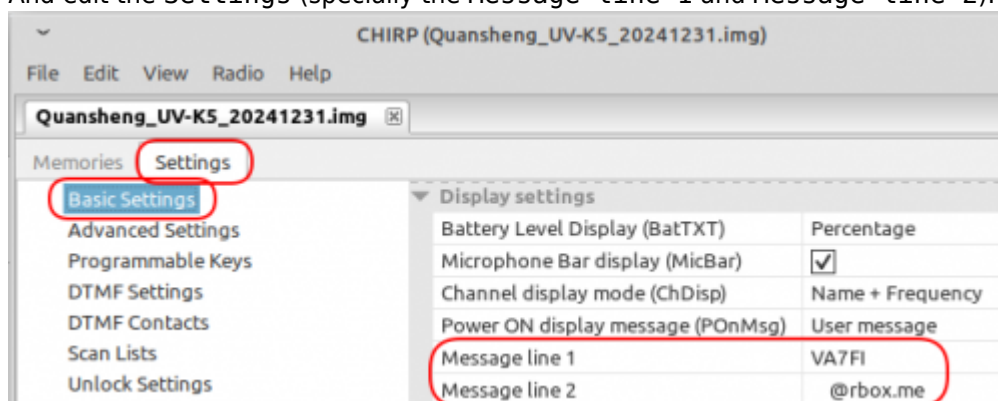

5. Upload the settings to the radio
(Radio → Upload to Radio → Vendor: Quansheng / Model: UV-K5 (+ OSFW, unsupported, egzumer))

The customer firmware offers a lot more options. Here's picture of the stock firmware on the left and the customer firmware on the right:

